

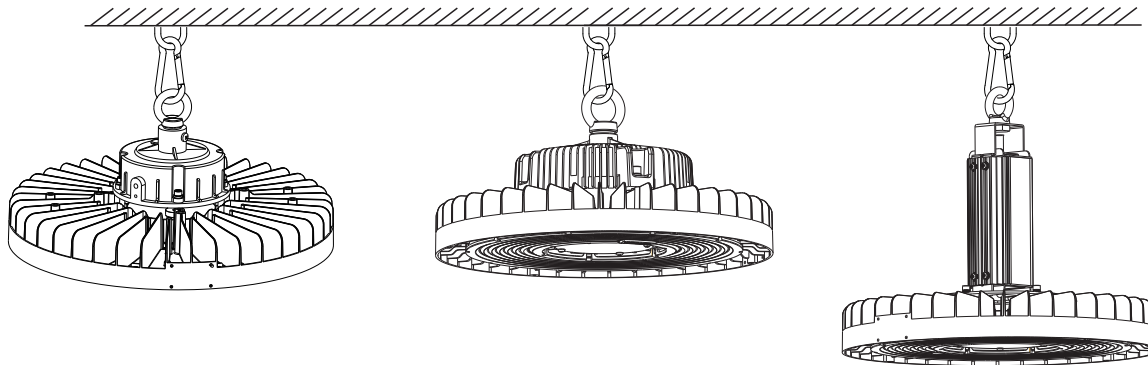



Abmessungen (Einheiten: mm/inch)

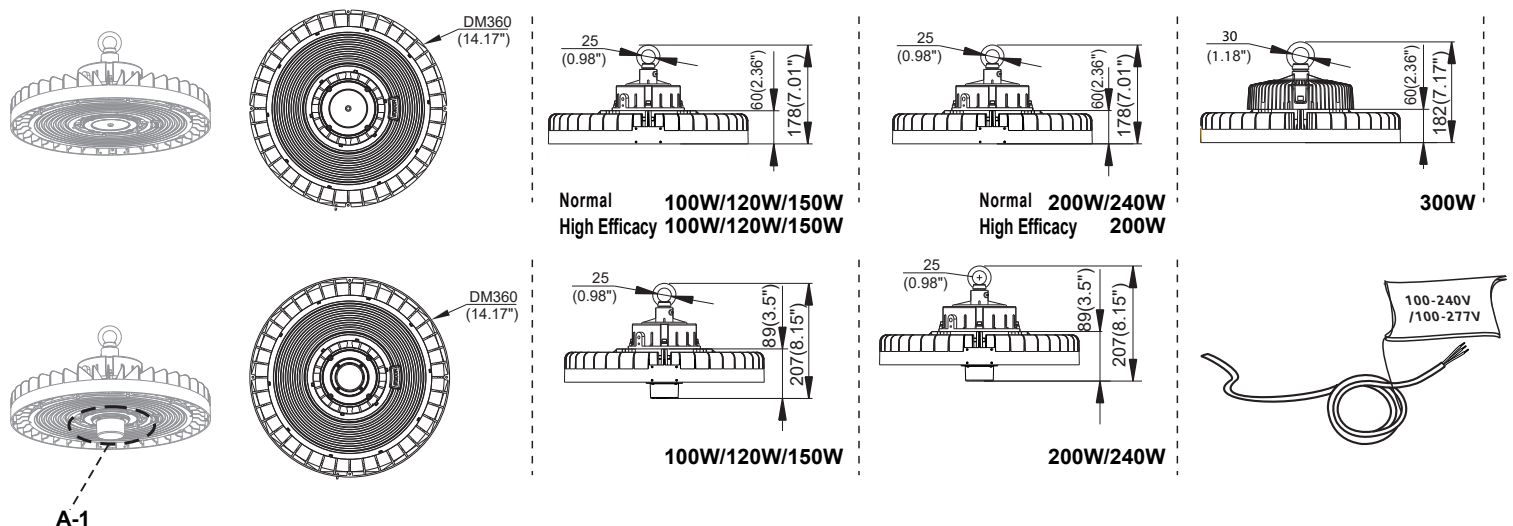

A-1 smartCon Modul

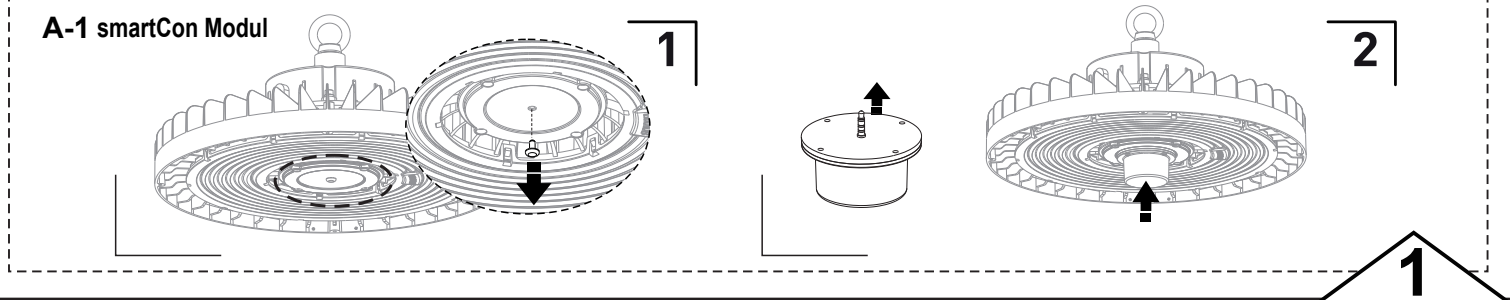

Abmessungen (Einheiten: mm/inch)

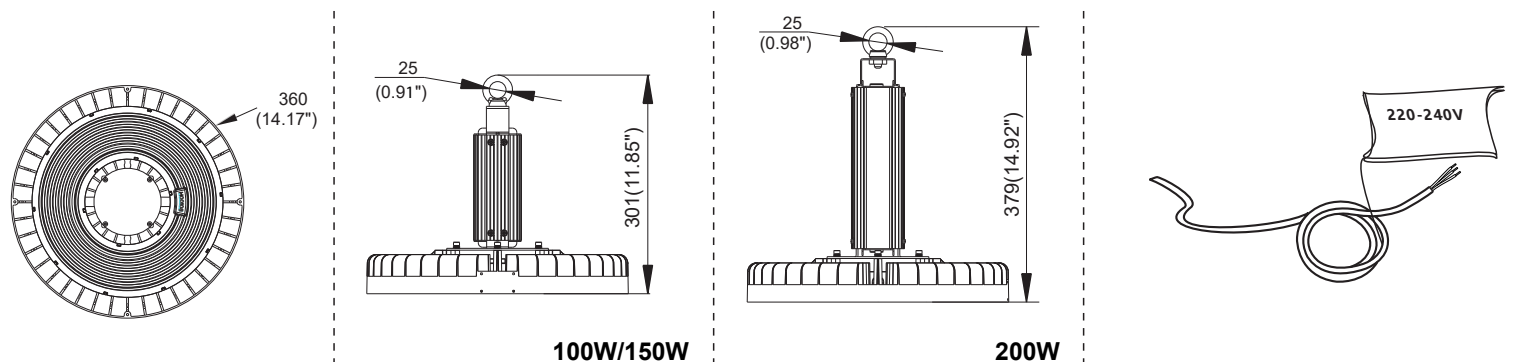

Montageanleitung

Titan

Produkt Spezifikationen	Normal	100W	120W	150W	200W	240W	300W
	190lm/Watt	100W	120W	150W	200W		
Abmessung (Lx W x H)		360 x 178mm (14.17" x 7.01")					360 x182mm (14.17" x7.17")
Gewicht		3.9±0.3kg (8.6±0.66Lbs)			4.3±0.3kg (9.47±0.66Lbs)		5.1±0.3kg (11.24±0.66Lbs)
Spannung		100-240 VAC / 100-277VAC					
Umgebungs Temperatur	Normal	-30°C to +50°C (-22°F to +122°F)					
	smartCon	0°C to +50°C (32°F to +122°F)					
Lagertemperatur		-40°C to +70°C (-40°F to +158°F)					

Titan HT

Produkt Spezifikationen		100W	150W	200W
Abmessung (L x W x H)		360 x 301mm (14.17" x 11.85")		360 x 379mm (14.17" x 14.92")
Gewicht		3.9±0.3kg (8.59±0.66Lbs)		4.3±0.3kg (9.48±0.66Lbs)
Spannung		220-240 VAC		
Umgebungs Temperatur	5 J Garantie	-30°C to + 65°C (-22°F to +149°F)		
	10 J Garantie	-30°C to + 50°C (-22°F to +122°F)		
Lagertemperatur		-40°C to +70°C (-40°F to +158°F)		

L	brown	black	Dimm			
N	blue	white	DIM+ / DA1	blue	brown	purple
⊕ GND	yellow/green	green	DIM- / DA2	white	blue	gray
						black

•if the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.